




IRBX型 系列号：A8046

“IRBX”是锥面式快速接头，具有符合国际标准ISO7241-1B的互换性，316不锈钢制造，针对有腐蚀性的环境或介质。

互换性标准：ISO 7241-1 B。

特点：材质为AISI316不锈钢，锥面式，钢珠锁定。

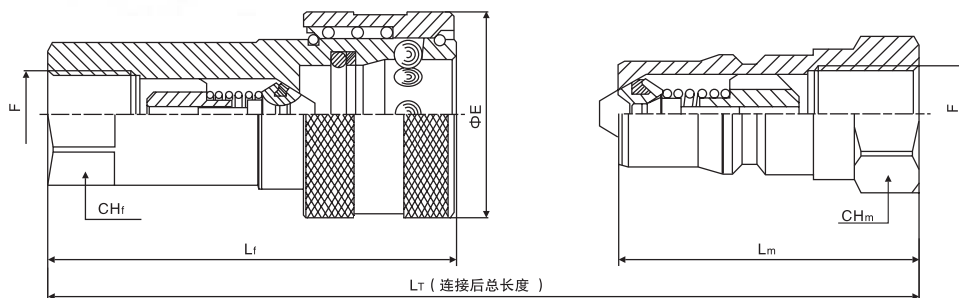

ISO	CH _f	CH _m	ΦE	L _T	L _f	L _m	F	母接头(F)订货号	公接头(M)订货号	组合订货号
5	14	14	23	60.5	48.8	30	G1/8	IRBX-F-G1/8	IRBX-M-G1/8	IRBX-FM-G1/8
							1/8NPT	IRBX-F-1/8NPT	IRBX-M-1/8NPT	IRBX-FM-1/8NPT
6.3	19	19	27	70.7	57	35	G1/4	IRBX-F-G1/4	IRBX-M-G1/4	IRBX-FM-G1/4
							1/4NPT	IRBX-F-1/4NPT	IRBX-M-1/4NPT	IRBX-FM-1/4NPT
10	24	24	34	82.7	66	41	G3/8	IRBX-F-G3/8	IRBX-M-G3/8	IRBX-FM-G3/8
							3/8NPT	IRBX-F-3/8NPT	IRBX-M-3/8NPT	IRBX-FM-3/8NPT
12.5	27	27	42	92.6	73.9	46	G1/2	IRBX-F-G1/2	IRBX-M-G1/2	IRBX-FM-G1/2
							1/2NPT	IRBX-F-1/2NPT	IRBX-M-1/2NPT	IRBX-FM-1/2NPT
20	36	36	50	111.1	90.1	55	G3/4	IRBX-F-G3/4	IRBX-M-G3/4	IRBX-FM-G3/4
							3/4NPT	IRBX-F-3/4NPT	IRBX-M-3/4NPT	IRBX-FM-3/4NPT
25	41	41	60	133.2	106.2	66	G1	IRBX-F-G1	IRBX-M-G1	IRBX-FM-G1
							1NPT	IRBX-F-1NPT	IRBX-M-1NPT	IRBX-FM-1NPT

IRBX型A8046系列技术参数

ISO	DN	接合状态下 最大工作压力(bar)	公称流量(L/min)
5	5.0	250	3 - 8
6.3	6.0	250	12 - 24
10	8.0	200	23 - 46
12.5	10.5	200	45 - 90
20	16.0	160	74 - 148
25	21.0	125	100 - 200