

PVM4



Caratteristiche tecniche

- Intercambiabilità: con i principali produttori
- Occlusione: valvola
- Aggancio: a vite
- Materiale: acciaio
- Finitura: Zn-Fe (Cr III)
- Filettature: BSP – NPT
- Guarnizioni standard: NBR
- Temperatura d'esercizio: -25 °C +100 °C
- Guarnizioni opzionali: FKM, EPDM o altro
- Pressioni di esercizio: 700 bar
- Connessione in pressione: consentita (lato maschio o lato femmina)

Nominal size				Max working pressure	Rated flow	Max flow rate	Min burst pressure			Fluid spillage
DNP	BG	ISO	mm				Male	Female	Coupled	
06	1	6.3	4	70	5	15	150	200	220	0,2
10	2	10	5,5	70	9	20	150	200	220	0,6

Technical data


- Interchange: with the main producers
- Occlusion: poppet
- Locking: screw
- Material: steel
- Finishing: Zn-Fe (Cr III)
- Threads: BSP – NPT
- Standard seals: NBR
- Working temperature: -25 °C +100 °C
- Optional seals: FKM, EPDM or more
- Working pressure: 700 bar
- Connection under pressure: allowed (both male or female side)

Technische Merkmale


- Austauschbarkeit: mit den wichtigsten Lieferanten
- Verschluss: ventil
- Kupplung: Schraubweise
- Werkstoff: Stahl
- Ausführung: Zn-Fe (Cr III)
- Gewinde: BSP – NPT
- Standard-Dichtungen: NBR
- Betriebstemperatur: -25 °C +100 °C
- Dichtungen nach Wahl: FKM, EPDM, usw.
- Betriebsdruck: 700 bar
- Kuppeln unter Druck: erlaubt (Steckerseite oder Muffenseite)

Caracteristiques techniques

- Intercambiabilité: avec les principaux producteurs
- Obturation: clapet
- Accrochage: a vissé
- Matériel: acier
- Traitement: Zn-Fe (Cr III)
- Taraudage: BSP – NPT
- Joints standard: NBR
- Température de service: -25 °C +100 °C
- Joints facultatifs: FKM, EPDM, ect.
- Pression de service: 700 bar
- Connexion sous pression: possible (côté male ou femelle)

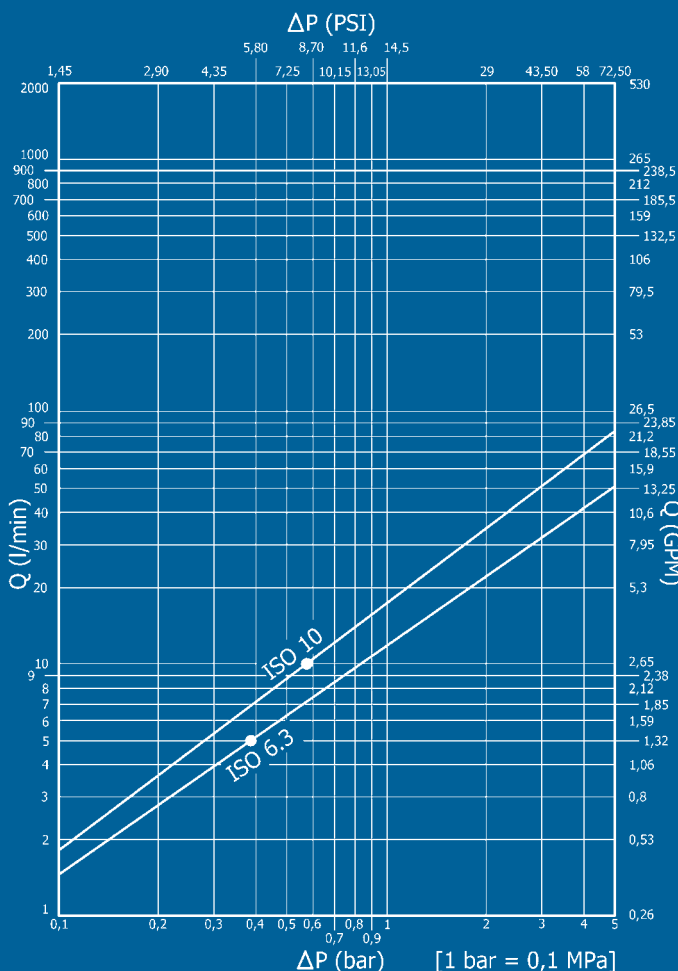


PVM4 DN06 - BG 1 - ISO 6.3

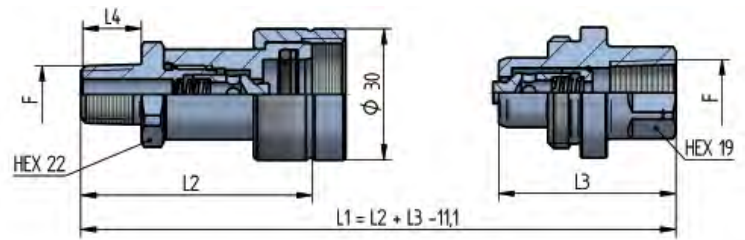

THREADS	L2	L3	L4	F	STANDARD	FEMMINA - FEMALE - MUFFE - FEMELLE			MASCHIO - MALE - STECKER - MALE		
						COD. F	Weight (g)	Packaging (pcs.)	COD. M	Weight (g)	Packaging (pcs.)
IG 1	56	39		NPT 1/4"	ANSI B1.20.3	PVM4.0606.012	145	100	PVM4.0606.013	85	120
AG 7	53	60	14	NPT 1/4"	ANSI B1.20.3	PVM4.0606.022	125	100	PVM4.0606.023*	115	66
AG 5	51,5	58,5	10,5	BSP 1/4"	JIS B8363	PVM4.0606.212*	120	100	PVM4.0606.213*	110	66

* REALIZZATI SU RICHIESTA DEL CLIENTE - AVAILABLE ON REQUEST - AUF ANFRAGE LIEFERBAR - DISPONIBLES SUR DEMANDE


PVM4 DN10 - BG 2 - ISO 10

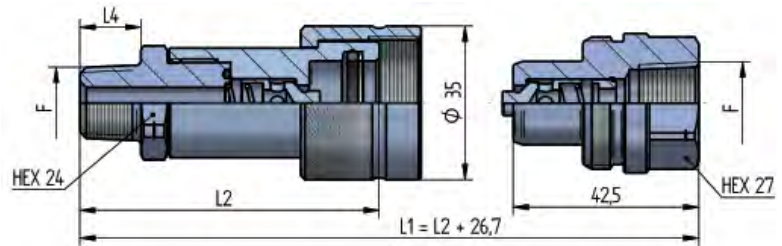


THREADS	L2	L4	F	STANDARD	FEMMINA - FEMALE - MUFFE - FEMELLE			MASCHIO - MALE - STECKER - MALE		
					COD. F	Weight (g)	Packaging (pcs.)	COD. M	Weight (g)	Packaging (pcs.)
IG 1	66,5		BSP 3/8"	DIN 3852-2-X	PVM4.1010.112	249	70	PVM4.1010.003	129	100
	66		NPT 3/8"	ANSI B1.20.3	PVM4.1010.012	250	70	PVM4.1010.013	130	100
AG 7	64,5	14	NPT 1/4"	ANSI B1.20.3	PVM4.1006.022*	219	70			
	62	14	NPT 3/8"	ANSI B1.20.3	PVM4.1010.022	231	70			

* REALIZZATI SU RICHIESTA DEL CLIENTE - AVAILABLE ON REQUEST - AUF ANFRAGE LIEFERBAR - DISPONIBLES SUR DEMANDE


THREADS



IG 1



AG 5



AG 7

PLASTIC


NOMINAL SIZE			FEMALE DUST PLUG			MALE DUST CAP			COLOUR	MATERIAL
DNP	BG	ISO	COD. F	Weight (g)	Packaging (pcs.)	COD. M	Weight (g)	Packaging (pcs.)		
10	2	10	SPVS.10001	16	50	SPVS.10001	16	50	RED	Polyethylene
10	2	10	SPVS.10041	16	50	SPVS.10041	16	50	BLACK	Polyethylene

METAL


NOMINAL SIZE			FEMALE DUST PLUG			MALE DUST CAP			MATERIAL
DNP	BG	ISO	COD. F	Weight (g)	Packaging (pcs.)	COD. M	Weight (g)	Packaging (pcs.)	
06	1	6.3	SPVS.06100	80	150	SPVS.06101	85	100	Steel with chain
06	1	6.3	SPVS.06102	36	150	SPVS.06103	34	100	Aluminium with chain
10	2	10	SPVS.10100 C	119	100	SPVS.10103 C	109	50	Steel with chain
10	2	10	SPVS.10102 C	49	100				Aluminium with chain
10	2	10	SPVS.10100 L	114	50	SPVS.10103 L	104	50	Steel with plastic tongue
10	2	10	SPVS.10102 L	44	50				Aluminium with plastic tongue

GUARNIZIONI DI RICAMBIO / SPARE PARTS / ERSATZDICHTUNGEN / JOINTS

AL CODICE DELLA GUARNIZIONE IN NBR AGGIUNGERE 'E' PER EPDM o 'V' PER VITON

TO THE NBR GASKET CODE ADD 'E' FOR EPDM OR 'V' FOR VITON

ZU DER ARTIKELNR. DER NBR DICHTUNG GEBEN SIE 'E' FUER EPDM ODER 'V' FUER VITON AN

AU CODE DU JOINT EN NBR JOINDRE 'E' POUR EPDM OU 'V' POUR VITON

NOMINAL SIZE			FEMALE GASKET	
DNP	BG	ISO	NBR	PTFE
06	1	6.3	PVS.006.120	PVS.006.130
10	2	10	PDV.010.120	PVS.010.130