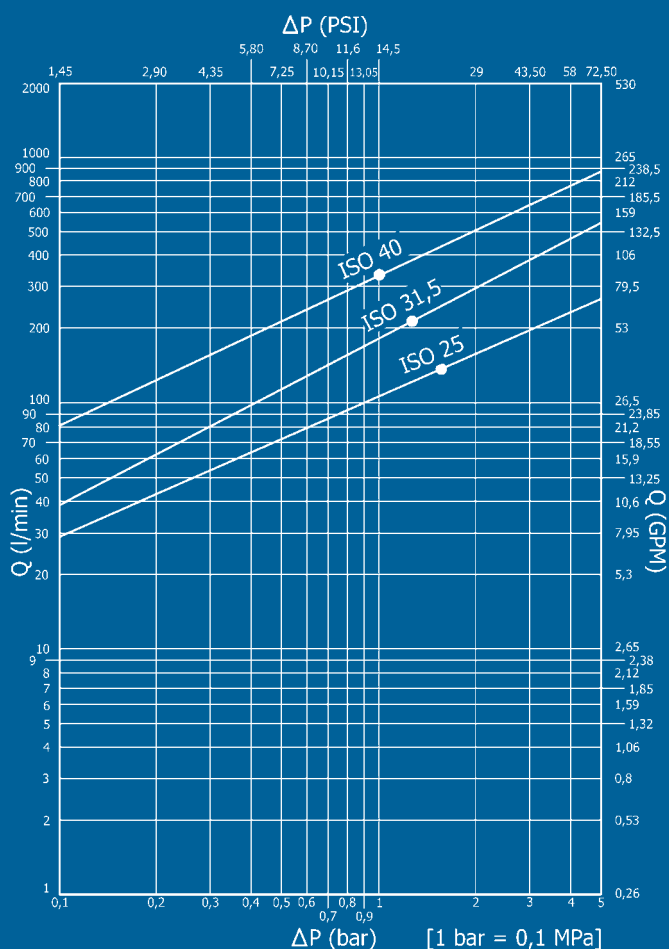


PVR1



Nominal size				Max working pressure	Rated flow	Max flow rate	Min burst pressure			Fluid spillage
DNP	BG	ISO	mm				Male	Female	Coupled	
25	5	25	17,8	35	150	300	140	140	140	16
30	6	31.5	21,7	32	230	460	125	125	125	30
39	7	40	25,3	30	340	700	120	120	120	54



Caratteristiche tecniche

- Intercambiabilità: innesti RoFLEX
- Occlusione: valvola
- Aggancio: a vite
- Materiale: acciaio
- Finitura: Zn-Fe (Cr III)
- Filettature: BSP – NPT
- Guarnizioni standard: NBR
- Temperatura d'esercizio: -25 °C +100 °C
- Guarnizioni opzionali: FKM, EPDM o altro
- Pressioni di esercizio: 300-350 bar
- Connessione in pressione: consentita (lato maschio o lato femmina)
- Massima pressione residua: 100 bar

Technical data

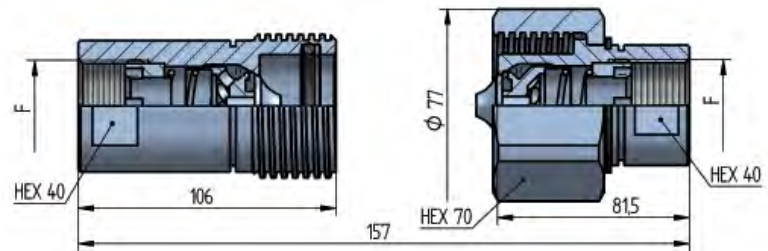
- Interchange: RoFLEX couplings
- Occlusion: poppet
- Locking: screw
- Material: steel
- Finishing: Zn-Fe (Cr III)
- Threads: BSP – NPT
- Standard seals: NBR
- Working temperature: -25 °C +100 °C
- Optional seals: FKM, EPDM or more
- Working pressure: 300-350 bar
- Connection under pressure: allowed (both male or female side)
- Max residual pressure: 100 bar

Technische Merkmale

- Austauschbarkeit: RoFLEX kupplungen
- Verschluss: ventil
- Kupplung: Schraubweise
- Werkstoff: Stahl
- Ausführung: Zn-Fe (Cr III)
- Gewinde: BSP – NPT
- Standard-Dichtung: NBR
- Betriebstemperatur: -25 °C +100 °C
- Dichtungen nach Wahl: FKM, EPDM, usw.
- Betriebsdruck: 300-350 bar
- Kuppeln unter Druck: erlaubt (Steckerseite oder Muffenseite)
- Max. Restdruck: 100 bar

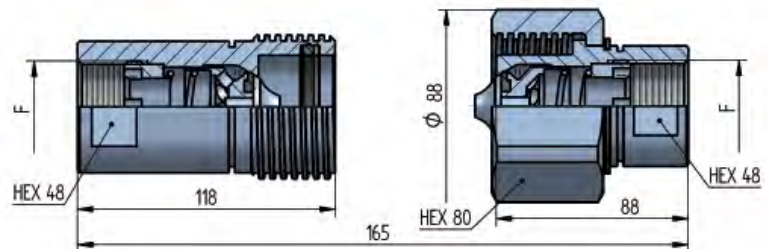
Caracteristiques techniques

- Intercambiabilité: coupleurs RoFLEX
- Obturation: clapet
- Accrochage: a vissé
- Matériel: acier
- Traitement: Zn-Fe (Cr III)
- Taraudage: BSP – NPT
- Joints standard: NBR
- Température de service: -25 °C +100 °C
- Joints facultatifs: FKM, EPDM, ect.
- Pression de service: 300-350 bar
- Connexion sous pression: possible (côté male ou femelle)
- Pression restante max: 100 bar

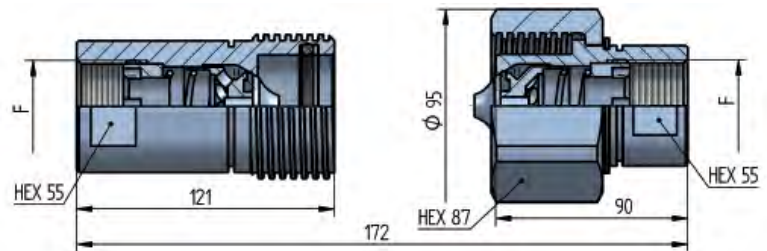
PVR1 DN25 - BG 5 - ISO 25


F	STANDARD	FEMMINA - FEMALE - MUFFE - FEMELLE			MASCHIO - MALE - STECKER - MALE		
		COD. F	Weight (g)	Packaging (pcs.)	COD. M	Weight (g)	Packaging (pcs.)
BSP 1"	DIN 3852-2-X	PVR1.2525.002*	1165	18	PVR1.2525.003*	1130	12
NPT 1"	ANSI B1.20.3	PVR1.2525.012*	1172	18	PVR1.2525.013*	1137	12

* PRODOTTI IN FASE DI REALIZZAZIONE - SHORTLY IN PRODUCTION - FERTIGUNG IN KÜRZE - EN COURS DE REALISATION

PVR1 DN30 - BG 6 - ISO 31.5


F	STANDARD	FEMMINA - FEMALE - MUFFE - FEMELLE			MASCHIO - MALE - STECKER - MALE		
		COD. F	Weight (g)	Packaging (pcs.)	COD. M	Weight (g)	Packaging (pcs.)
BSP 1"¼	DIN 3852-2-X	PVR1.3031.002	1555	12	PVR1.3031.003	1786	8
NPT 1"¼	ANSI B1.20.3	PVR1.3031.012	1568	12	PVR1.3031.013	1800	8

PVR1 DN39 - BG 7 - ISO 40


F	STANDARD	FEMMINA - FEMALE - MUFFE - FEMELLE			MASCHIO - MALE - STECKER - MALE		
		COD. F	Weight (g)	Packaging (pcs.)	COD. M	Weight (g)	Packaging (pcs.)
BSP 1"½	DIN 3852-2-X	PVR1.3939.002*	2022	8	PVR1.3939.003*	2320	5
NPT 1"½	ANSI B1.20.3	PVR1.3939.012*	2040	8	PVR1.3939.013*	2340	5

* PRODOTTI IN FASE DI REALIZZAZIONE - SHORTLY IN PRODUCTION - FERTIGUNG IN KÜRZE - EN COURS DE REALISATION


PLASTIC



NOMINAL SIZE			FEMALE DUST CAP			MALE DUST PLUG			COLOUR	MATERIAL
DNP	BG	ISO	COD. F	Weight (g)	Packaging (pcs.)	COD. M	Weight (g)	Packaging (pcs.)		
25	5	25	SPVR.25002*	70	25	SPVR.25003*	80	25	BLACK	PVC
30	6	31.5	SPVR.30002	107	15	SPVR.30003	115	15	BLACK	PVC
39	7	40	SPVR.39002*	200	10	SPVR.39003*	210	10	BLACK	PVC

* PRODOTTI IN FASE DI REALIZZAZIONE - SHORTLY IN PRODUCTION - FERTIGUNG IN KÜRZE - EN COURS DE REALISATION

METAL



NOMINAL SIZE			FEMALE DUST CAP			MALE DUST PLUG			COLOUR	MATERIAL
DNP	BG	ISO	COD. F	Weight (g)	Packaging (pcs.)	COD. M	Weight (g)	Packaging (pcs.)		
25	5	25	SPVR.25202*	100	25	SPVR.25203*	110	25	-	Aluminium
30	6	31.5	SPVR.30202	190	15	SPVR.30203	200	15	-	Aluminium
39	7	40	SPVR.39202*	280	10	SPVR.39203*	300	10	-	Aluminium

* PRODOTTI IN FASE DI REALIZZAZIONE - SHORTLY IN PRODUCTION - FERTIGUNG IN KÜRZE - EN COURS DE REALISATION

GUARNIZIONI DI RICAMBIO / SPARE PARTS / ERSATZDICHTUNGEN / JOINTS

AL CODICE DELLA GUARNIZIONE IN NBR AGGIUNGERE 'E' PER EPDM o 'V' PER VITON

TO THE NBR GASKET CODE ADD 'E' FOR EPDM OR 'V' FOR VITON

ZU DER ARTIKELNR. DER NBR DICHTUNG GEBEN SIE 'E' FUER EPDM ODER 'V' FUER VITON AN

AU CODE DU JOINT EN NBR JOINDRE 'E' POUR EPDM OU 'V' POUR VITON

NOMINAL SIZE			FEMALE GASKET	
DNP	BG	ISO	NBR	PTFE
25	5	25	PVR.025.120	PVR.025.130
30	6	31.5	PVR.030.120	PVR.030.130
39	7	40	PVR.039.120	PVR.039.130