



VNR-VNRX

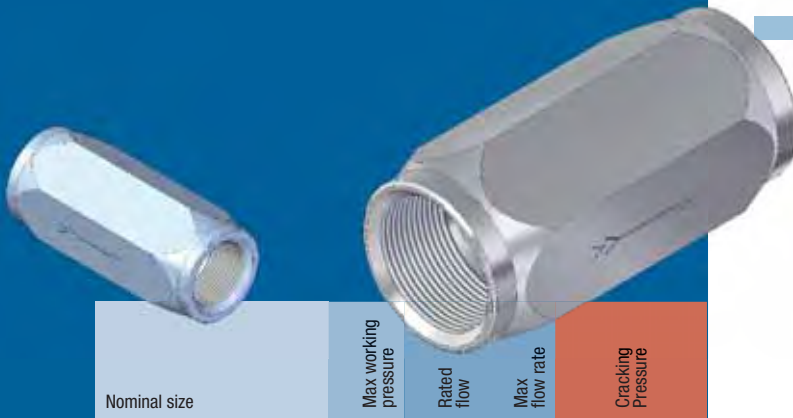

	Nominal size				Max working pressure	Rated flow	Max flow rate	Cracking Pressure
	DNP	BG	ISO	mm	Mpa	l/min	l/min	Mpa
VNR1	06	1	6,3	7	35	15	20	0,05 ± 0,01
	10	2	10	10	35	30	40	0,05 ± 0,01
	13	3	12,5	11	32	50	90	0,05 ± 0,01
	20	4	20	17	30	90	180	0,05 ± 0,01
	25	5	25	21	25	150	280	0,05 ± 0,01
	30	6	31,5	29	25	200	379	0,05 ± 0,01
	39	7	40	34	21	300	860	0,05 ± 0,01
VNRX	04	0	5	4	35	3	6	0,05 ± 0,01
	06	1	6,3	7	35	12	20	0,05 ± 0,01
	10	2	10	10	35	23	40	0,05 ± 0,01
	13	3	12,5	11	35	45	90	0,05 ± 0,01
	20	4	20	17	30	106	180	0,05 ± 0,01
	25	5	25	21	25	189	280	0,05 ± 0,01
	30	6	31,5	29	25	379	379	0,05 ± 0,01
	39	7	40	34	25	379	860	0,05 ± 0,01
	50	8	50	40	15	757	1400	0,05 ± 0,01

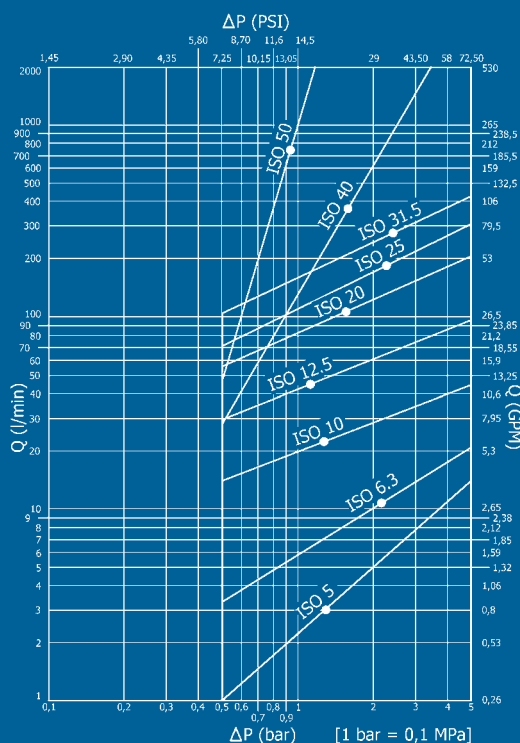

Caratteristiche tecniche

- Materiale: acciaio o acciaio inox AISI 316
- Finitura: Zn-Fe (VNR1)
- Filettature: BSP – NPT
- Guarnizioni standard: NBR (VNR1)/FKM (VNRX)
- Temperatura d'esercizio (VNR1): -25 °C +100 °C
- Temperatura d'esercizio (VNRX): -25 °C +200 °C
- Guarnizioni opzionali: FKM, EPDM o altro
- Pressioni di esercizio: 150-350 bar
- Taratura standard: 0,5 bar

Technical data

- Material: steel or stainless steel AISI 316
- Finishing: Zn-Fe (VNR1)
- Threads: BSP – NPT
- Standard seals: NBR (VNR1)/FKM (VNRX)
- Working temperature (VNR1): -25 °C +100 °C
- Working temperature (VNRX): -25 °C +200 °C
- Optional seals: FKM, EPDM or more
- Working pressure: 150-350 bar
- Cracking point: 0,5 bar


Technische Merkmale

- Werkstoff: Stahl oder rostfreiem Stahl AISI 316
- Ausführung: Zn-Fe (VNR1)
- Gewinde: BSP – NPT
- Standard-Dichtungen: NBR (VNR1)/FKM (VNRX)
- Betriebstemperatur (VNR1): -25 °C +100 °C
- Betriebstemperatur (VNRX): -25 °C +200 °C
- Dichtungen nach Wahl: FKM, EPDM, usw.
- Betriebsdruck: 150-350 bar
- Eichwert: 0,5 bar

Caracteristiques techniques


- Matériel: acier ou acier inoxydable AISI 316
- Traitement: Zn-Fe (VNR1)
- Taraudage: BSP – NPT
- Joints standard: NBR (VNR1)/FKM (VNRX)
- Température de service (VNR1): -25 °C +100 °C
- Température de service (VNRX): -25 °C +200 °C
- Joints facultatifs: FKM, EPDM, ect.
- Pression de service: 150-350 bar
- Tarage: 0,5 bar

VNR1 / STEEL / DN06-DN39

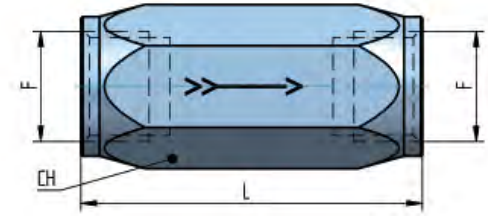

DNP	BG	ISO	CH	L	F	STANDARD		
							COD. F	Weight(g)
06	1	6,3	19	55	BSP 1/4"	DIN 3852-2-X	VNR1.06.002	100
10	2	10	25	60	BSP 3/8"	DIN 3852-2-X	VNR1.10.002	180
13	3	12,5	28	75	BSP 1/2"	DIN 3852-2-X	VNR1.13.002	310
20	4	20	35	88	BSP 3/4"	DIN 3852-2-X	VNR1.20.002	450
25	5	25	41	105	BSP 1"	DIN 3852-2-X	VNR1.25.002	950
30	6	31,5	50	135	BSP 1 1/4"	DIN 3852-2-X	VNR1.30.002	1490
39	7	40	65	145	BSP 1 1/2"	DIN 3852-2-X	VNR1.39.002	2400

VNRX / STAINLESS STEEL / DN04-DN50

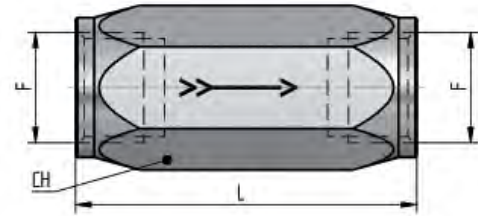

DNP	BG	ISO	L	CH	F	STANDARD		
							COD. F	Weight(g)
04	0	5	14	42	BSP 1/8"	DIN 3852-2-X	VNRX.04.002	73
04	0	5	14	42	NPT 1/8"	ANSI B1.20.3	VNRX.04.012	74
06	1	6,3	19	50	BSP 1/4"	DIN 3852-2-X	VNRX.06.002	82
06	1	6,3	19	50	NPT 1/4"	ANSI B1.20.3	VNRX.06.012	83
10	2	10	24	60	BSP 3/8"	DIN 3852-2-X	VNRX.10.002	155
10	2	10	24	60	NPT 3/8"	ANSI B1.20.3	VNRX.10.012	159
13	3	12,5	27	65	BSP 1/2"	DIN 3852-2-X	VNRX.13.002	193
13	3	12,5	27	65	NPT 1/2"	ANSI B1.20.3	VNRX.13.012	201
20	4	20	34	75	BSP 3/4"	DIN 3852-2-X	VNRX.20.002	340
20	4	20	34	75	NPT 3/4"	ANSI B1.20.3	VNRX.20.012	350
25	5	25	41	93	BSP 1"	DIN 3852-2-X	VNRX.25.002	586
25	5	25	41	93	NPT 1"	ANSI B1.20.3	VNRX.25.012	604
30	6	31,5	50	110	BSP 1 1/4"	DIN 3852-2-X	VNRX.30.002	960
30	6	31,5	50	110	NPT 1 1/4"	ANSI B1.20.3	VNRX.30.012	980
39	7	40	55	112	BSP 1 1/2"	DIN 3852-2-X	VNRX.39.002	1004
39	7	40	55	112	NPT 1 1/2"	ANSI B1.20.3	VNRX.39.012	1020
50	8	50	75	120	BSP 2"	DIN 3852-2-X	VNRX.50.002	2020
50	8	50	75	120	NPT 2"	ANSI B1.20.3	VNRX.50.012	2040