



PSH SERIES

105-1

Manufactured according to ISO 7241-A and ISO 5675 norms.
 Poppet Valve or Ball closing system.
 BSP, NPTF, SAE/ORB threads. Other threads available upon request.

• Materials

Carbon Steel EN -10277-3
 Seals: NBR, Viton or EPDM
 Back-Up-Ring: PTFE
 Balls: AISI 1010/1015
 Springs: Carbon Steel
 DIN 17233/84(B)

• Working temperature (Seals)

	NBR o-rings	Viton o-rings	EPDM o-rings
+	+100°C	+200°C	+150°C
-	-30°C	-10°C	-40°C

• **Applications:** Designed for Oil hydraulic Applications according to European Directive 97.23,EC

• **Sectors:** Industrial, Agricultural




• Equivalence

FASTER PV / CPV
 ARGUS SVK
 PARKER 4200

MODEL STRUCTURE

Example;

105.11113 BD

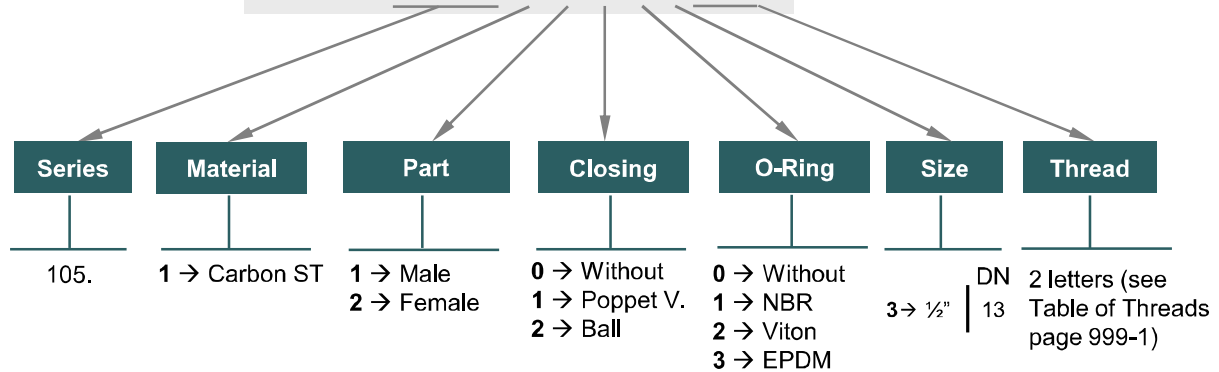



PSH SERIES



MALE				
DN	CH1	L1	ØF	L
13	27	46	20,56	87,50
		48		89,50
	30	50		91,50

STANDARD MALE MODELS			
DN	ØA	MALE	
13	1/2" BSP	101.11113AD	300Bar
	1/2" NPTF	101.11113BD	
	M22x1,5	101.11113NG	
	3/4" - 16ORB	101.11113GF	
	1/8" 14ORB	101.11113GH	

FEMALE				
DN	CH2	L2	ØD	L
13	27	63,50	37,80	87,50

STANDARD FEMALE MODELS			
DN	ØA	FEMALE	
13	1/2" BSP	105.12113AD	300Bar
	1/2" NPTF	105.12113BD	
	M22x1,5	105.12113NG	